


Wireless Door Phone OP-D03



Specification

- 3.5 inch TFT LCD screen;
- 2.4G ISM digital public frequency;
- Effective range would be in free field 300 meters;
- Built-in backup battery for indoor phone;
- Maximum 2 cameras and 4 monitors at same time in a system;
- On screen display manual;
- Size : 102.5×66.5×18mm
- NW : 150g

Indoor Monitor

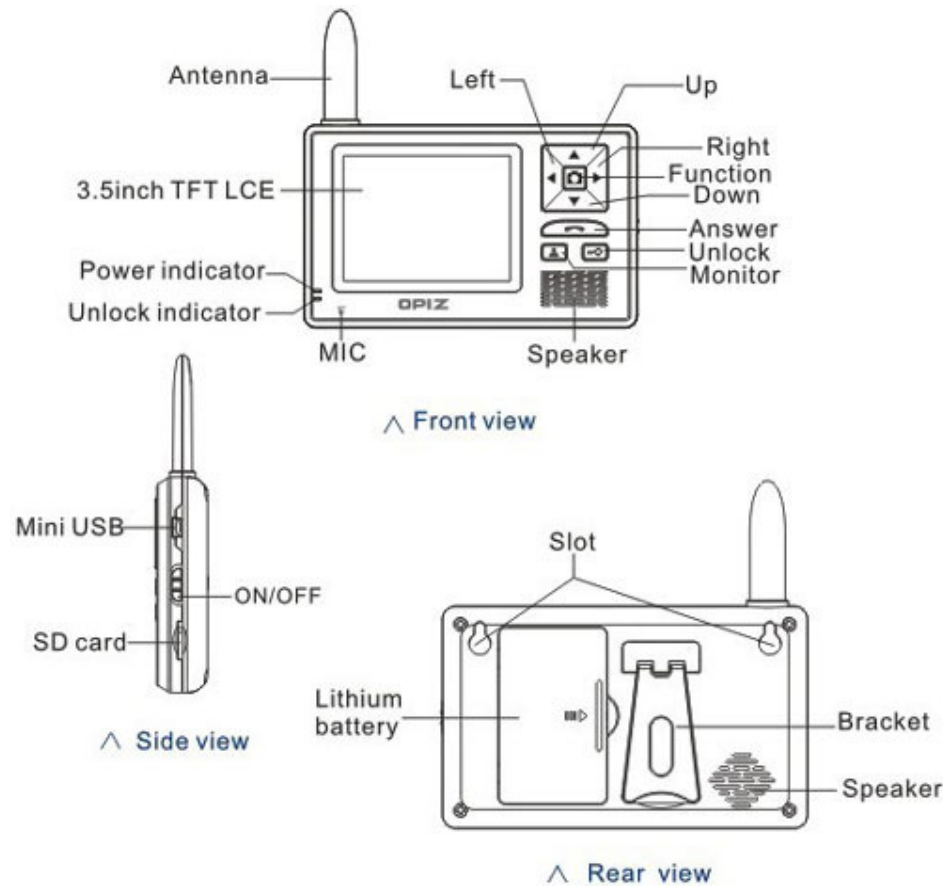

ISAB INTERNATIONAL SECURITY AB


Headquarters:

Box 5129
SE-350 05
Växjö
Sweden
Tfn: (+46) (0)470 79 58 88
<http://www.is-ab.se>
Mail: info@is-ab.se
VAT: 5561099119023

Branch Torekov:

Junkersgatan 15
SE-260 93
Torekov
Sweden
Tfn: (+46) (0)431 36 44 70
<http://www.is-ab.se>
Mail: info@is-ab.se

Outdoor Camera

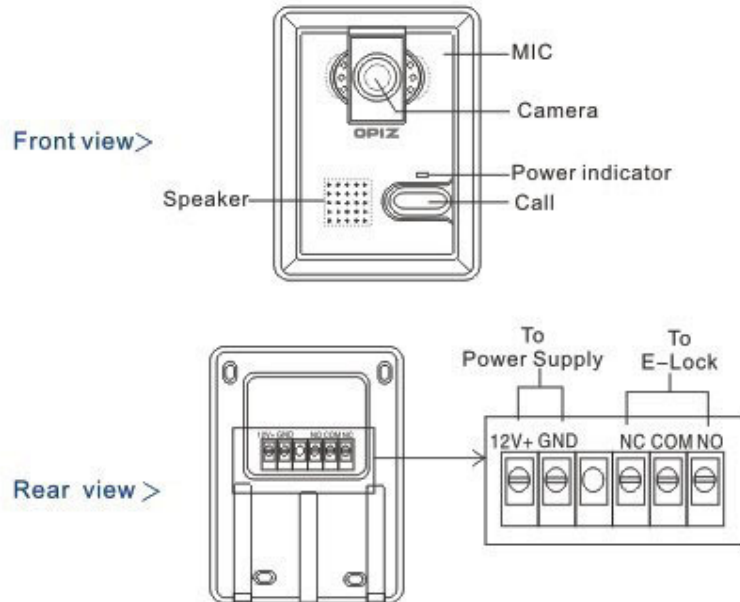

Technical data

Indoor monitor

Screen	3.5 inch TFT-LCD
Sensitivity	-90dBm
Standby Current	20-30mA/3.7V
Working Current	250mA
Battery Capacity	1350mah
Standby Time	120h
Dimension	102.5*66.5*18mm
N.W.	150g(package included)

Outdoor camera

Working rate	2402~2483.5MHz
Transmitting power	16-20dBm
Camera	1/4COMS
Power adapter	DC5V / 1A
Operating current	300mA, Standby current 20~30mA
Appearance size	127*95*38mm
N.W.	150g