



## Dörrstation OP-D6D3



### 1. Front view

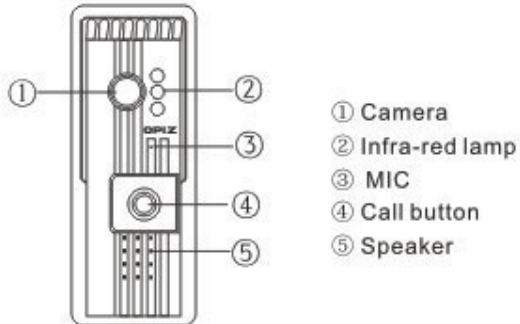

### 2. Rear view

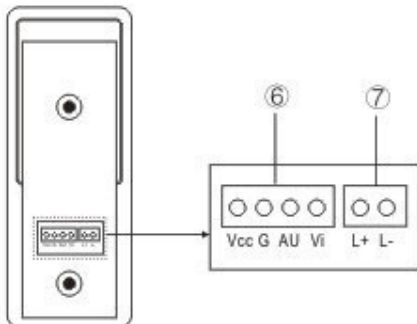

⑥ Wire terminals

⑦ 30W connect with lock, high level is effective, consumption 30W.

Vi Video line connect with indoor phone Vi

AU AU talking, calling and unlock line, connect with indoor phone AU

G A common line, connect with indoor phone G

12V Power supply of door unit, connect with indoor phone 12V

L+ Connects with lock. This line can be the signal line if it's not used for the lock, high level is for unlocking.

L- Connect with lock. This line can be the common line if it's not used for the lock.

## ISAB INTERNATIONAL SECURITY AB

### Headquarters:

Box 5129  
SE-350 05  
Växjö  
Sweden  
Tfn: (+46) (0)470 79 58 88  
<http://www.is-ab.se>  
Mail: [info@is-ab.se](mailto:info@is-ab.se)  
VAT: 5561099119023

### Branch Torekov:

Junkersgatan 15  
SE-260 93  
Torekov  
Sweden  
Tfn: (+46) (0)431 36 44 70  
<http://www.is-ab.se>  
Mail: [info@is-ab.se](mailto:info@is-ab.se)



## Technical data

Temperature	-40°C~70°C
Relative humidity	45%~95%
Almospheric pressure	86Kpa~108Kpa
Fire endurance rating	IP33
Working voltage	DC12V~DC15V
Static current	0.17mA
Working current	150mA
Camera	Color 420L; B/W 480L
Dimension	182×69×50mm
Installation size	182×69×50mm
N.W	840g