



Svarsapparat OP-D6A6



1. Front view

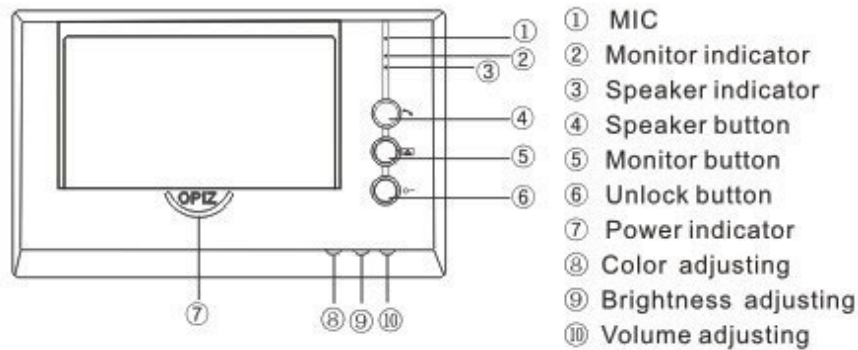

3. Rear view

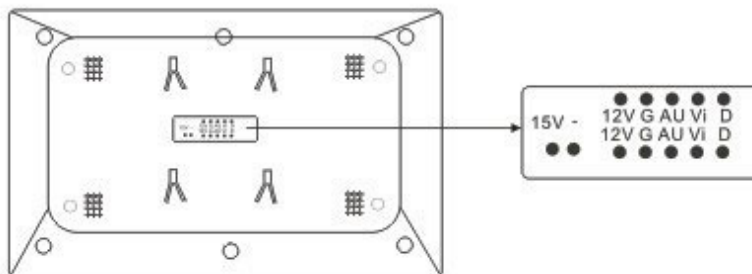

- Connect with power " - "
- + Connect with power " + "
- 12V Connect with door station power supply wire
- G Common wire
- AU Intercom & unlock line
- Vi Video line
- D Connect with others monitor (Exclusive signal)

ISAB INTERNATIONAL SECURITY AB

Headquarters:

Box 5129
SE-350 05
Växjö
Sweden
Tfn: (+46) (0)470 79 58 88
http://www.is-ab.se
Mail: info@is-ab.se
VAT: 5561099119023

Branch Torekov:

Junkersgatan 15
SE-260 93
Torekov
Sweden
Tfn: (+46) (0)431 36 44 70
http://www.is-ab.se
Mail: info@is-ab.se



Technical data

Screen	7 inch LCD
Temperature	-40°C~70°C
Relative humidity	45%~95%
Almospheric pressure	86Kpa~108Kpa
Fire endurance rating	IP33
Working voltage	DC13.5V
Static current	14mA
Working current	220mA
Dimension	250×155×30mm
Installation	Wall mounted
N.W	850g